


ELECTRO-HYDRAULIC 2- POST PARKING LIFT

MODEL - PPL-230C

3.0T

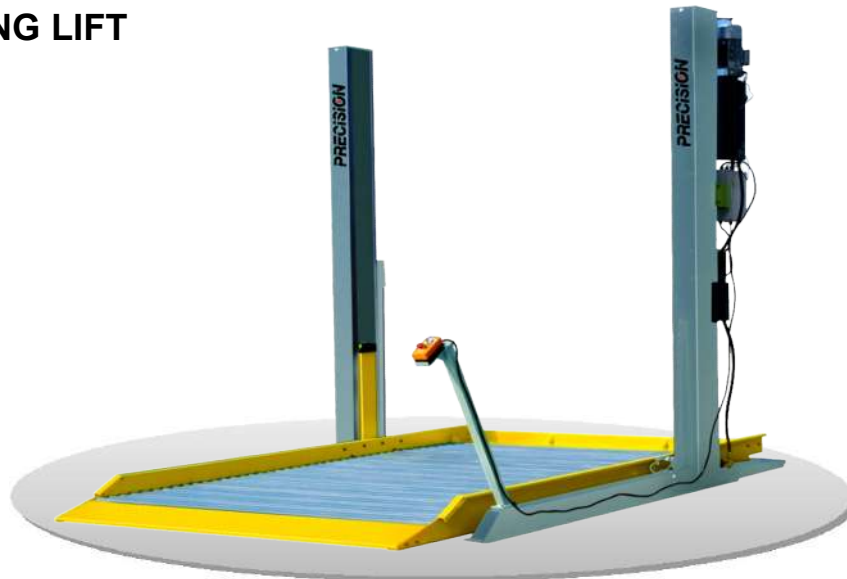

- 3.0 Ton lifting capacity..
- Freestanding design requires no special site preparation for installation
- Hot galvanized steel platform.
- Platform size can accommodate most vehicles including SUVs.
- 24V low voltage dead-man key operation prevents unauthorized use.
- Demountable platforms to maximize the container loading.
- Mechanical safety latch in each post.
- Electric/hydraulic power system.
- Parachute valves under each cylinder in case of hydraulic hose fracture.
- Relief valve to prevent overloading.
- Chain type synchronization cable for perfect balance

TECHNICAL SPECIFICATIONS

Capacity	3000 Kg
Maximum Lifting Height	2150 mm
Overall Height	3030 mm
Overall Length	3800 mm
Runway Length	1450 mm
Overall Width	2650 mm
Width between Columns	2290 mm
Lifting Time	60s
Lowering Time	50s

ELECTRIC SPECIFICATIONS

Electric Motor Power	2,2 Kw
Power	3ph. 220-380V trif. +/-5% / 50Hz

* Specifications subject to change without notice

** Images shown are for representation purpose only. Accessories & features shown in the picture may not be part of the standard equipment

PRECISION TESTING MACHINES PVT. LTD.

HEAD OFFICE: S-12, Okhla Industrial Area, Phase - II, New Delhi - 110 020 (India)

Tel.: 011-4161-0000 (4 lines), 2638-6612 Fax: 011-26383790

E-mail : sales@precisionworld.net / service@precisionworld.net / www.precisionworld.net